


KCM-3911

4M Indoor Hemispheric with D/N,
Advanced WDR, Fisheye lens




- 1/2.5" Progressive Scan CMOS
- Day and night function with mechanical IR cut filter
- Minimum illumination 0.06 lux at F2.8
- 180°/360° panorama and ePTZ view
- Built-in f1.05 mm / F2.8 Megapixel Fisheye lens
- 6 fps at 2032 x 1920 resolution
- Selectable H.264, MPEG-4 SP, MJPEG compressions with dual streaming
- Up to 6 cropped regions as independent channels
- Two-way audio
- Video motion detection
- Digital input and digital output
- Advanced WDR
- 2D+3D Digital Noise Reduction
- MircoSDHC card slot for local storage
- Powered by PoE Class 3 / DC 12V

PHOTO INDICATION

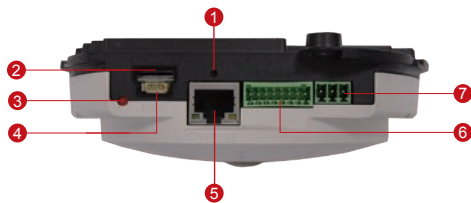

- | | |
|------------------------|--------------------------|
| 1 Reset button | 5 Ethernet port |
| 2 MicroSDHC Card Slot | 6 Digital Input & Output |
| 3 Power LED | 7 DC 12V Power Input |
| 4 Audio Input / Output | |

DIMENSION DIAGRAM



Unit: mm [inch]

ACCESSORY OPTIONS

Power Adapter

PPBX-0002



Universal Power Adapter,
100~240V,
4 different connectors included

Popular Mounting Solutions

Surface	Bundled surface mount plate	
Flush	PMAX-1009	
Wall	PMAX-0310	
Pendant	PMAX-0101 PMAX-0103	
Pole	PMAX-0310 PMAX-0503	

* For more mounting solutions, please refer to Project Planner on www.acti.com

PRODUCT SPECIFICATION**KCM-3911****• Device**

Device Type	Hemispheric Camera
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.5" (5.7 x 4.28 mm)
Day / Night	Yes
Minimum Illumination	Color: 1.63 lux at F2.8 (30 IRE, 2400°K); B/W: 0.06 lux at F2.8 (30 IRE, 2400°K)
Color to B/W switch	ISP based switch, configurable
Mechanical IR Cut Filter	Yes
IR Sensitivity Range	700 - 1100 nm
IR LED	No
Electronic Shutter	1/5 ~ 1/2,000 sec (manual mode); 1/5 ~ 1/10,000 sec (auto mode)

• Lens

Focal Length / Aperture	Fisheye Lens, 1.05 mm / F2.8
Iris	Fixed iris
Focus	Fixed Focus
Horizontal Viewing Angle	180°

• Video

Compression	H.264, MPEG-4 SP, MJPEG
Maximum Frame Rate vs. Resolution	6 fps at 2032 X 1920; 12 fps at 1920 X 1080; 12 fps at 1280 X 720; 12 fps at 640 X 480
Mode	Fisheye View; Dewarped View: 180° / 360° Panorama, ePTZ, 6 VGA, Motion Detection Preset
Multi-Streaming	Simultaneous dual streams based on two configurations in single view mode; Multiple streams based on single configuration in 6 cropped VGA mode
Bit Rate	28 Kbps - 6 Mbps (per stream)
Bit Rate Mode	Constant, Variable
Image Enhancement	Advanced WDR; White balance: automatic, hold and manual; Brightness; Saturation; Contrast; Edge enhancement; Automatic gain control; 2D+3D Digital noise reduction; Flickerless; Defogging
Privacy Mask	4 configurable regions
Text Overlay	User defined text on video

• Audio

Compression	8 kHz, Mono, PCM, 16 bit encoding; G.711
Audio-In	Cable with 3.5mm Phone Jack
Audio-Out	Cable with 3.5mm Phone Jack

• Network

Protocol & Service	TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour
Ethernet Port	1, Ethernet (10/100 Base-T), RJ-45 connector
Security	IP address filtering; HTTPS encryption; Password protected user levels; IEEE 802.1X network access control

• Alarm

Alarm Trigger	Video motion detection (3-6 regions, depending on video mode); External device through digital input
Alarm Response	Notify control center; Go to ePTZ preset point or preset tour; Change camera settings; Command other devices; E-mail notification with snapshots; Save video or snapshot to local storage; Upload video, snapshot to FTP server; Activate external device through digital output

• Interface

Digital Input	2, terminal block
Digital Output	2, terminal block
Local Storage	MicroSDHC memory card slot (card not included)

• General

Power Source / Consumption	PoE Class 3 (IEEE 802.3af) / 9.6W DC 12V / 7.68W (adapter not included)
Weight	425 g (0.93 lb)
Dimensions (Ø x H)	150mm x 45.32mm (5.9" x 1.8")
Bundled Accessories	Surface Mount Plate
Mount Type	Surface (via mount plate only), Flush, Wall, Pendant, Pole, Corner
Starting Temperature	-10 °C - 50°C (14°F - 122°F)
Operating Temperature	-10 °C - 50°C (14°F - 122°F)
Operating Humidity	10% ~ 85% RH
Approvals	CE (EN 55022 Class B, EN 55024), FCC (Part15 Subpart B Class B)

• Integration

Unified Solution	Fully compatible with ACTi software
ISV Integration	Software Development Kit (SDK) available ; ONVIF compliant
Firmware Access Browser	Microsoft Internet Explorer 8.0 or newer

* All specifications are subject to change without notice.

* All brand names and registered trademarks are the property of their respective owners.

www.acti.com